


POOL CHILLER HEAT PUMP SPECIFICATIONS		
Titanium Heat Exchanger / Rheem IQ Control		RTCH007TA-JQH-1 RTCH007TA-JQHL-1
Titanium Heat Exchanger / Rheem IQ Control (Low Temp)		
ELECTRICAL INPUT		
Voltage/Phase	220 - 240 Volts / 1 Phase / 50 Hz	
Full Load / Locked Rotor (Amps Per Phase)	15.2 FLA / 61 LRA	
Min. Circuit Breaker Size	20 Amps	
Refrigerant	R410a	
Nominal Cooling Capacity	7.32 kW	
Power Input	2.07 kW	
COP	3.54 COP	
Noise Level	51 dBA @ 3 m	
Rated Load Amps @ 8°C SST / 45°C SCT	10.2 Amps	
TECHNICAL DATA		
	Compressor	Fan
Reference/Size	20113	450mm
Type	Rotary	Axial
Number Per Unit	1	1
FLA (Full Load Amps, each)	14.5 Amps	0.64 Amps
Voltage / Phase	220 - 240 / 1	220 - 240 / 1
Pole/RPM	2/2,900	6/890
Air Flow	N/A	800 L/s
HEAT EXCHANGER (Water Side)		
Water In Temperature Range	Low	Standard
Type of Water Tube	Titanium Tube / PVC Shell	
Design	Shell and Tube	
Flow Rate Excl. By Pass	2.80 L/s	1.67 L/s
Design Temperature Difference	0.62 °C	1.05 °C
Min. Outlet Water Temp	7 °C	
Design Pressure Drop	25 kPa	
Max. Operating Pressure	300 kPa	
GENERAL INFORMATION		
Water Connections	40mm PVC	
Drain	20mm PVC	
Cabinet Construction	1.2mm Stucco Aluminium	
Approx. Shipping Weight (Standard/Low Temp)	85/95 kg	
Size L x W x H	1007 mm x 567 mm x 717 mm	

COP TABLE

	Water In °C	Ambient Temperature °C								
		10 °C	15 °C	20 °C	25 °C	27 °C	30 °C	35 °C	40 °C	45 °C
Standard Temp	30 °C	10.05 kW 6.52 COP	9.51 kW 5.64 COP	8.92 kW 4.86 COP	8.28 kW 4.17 COP	7.95 kW 3.85 COP	7.60 kW 3.55 COP	6.86 kW 2.99 COP	6.06 kW 2.47 COP	5.22 kW 1.99 COP
	27 °C	9.34 kW 5.94 COP	8.82 kW 5.15 COP	8.26 kW 4.45 COP	7.65 kW 3.83 COP	7.32 kW 3.54 COP	6.99 kW 3.26 COP	6.28 kW 2.74 COP	5.51 kW 2.26 COP	4.70 kW 1.81 COP
	25 °C	8.37 kW 5.20 COP	7.89 kW 4.53 COP	7.36 kW 3.93 COP	6.78 kW 3.39 COP	6.48 kW 3.13 COP	6.16 kW 2.88 COP	5.49 kW 2.41 COP	4.78 kW 1.97 COP	4.01 kW 1.56 COP
	20 °C	7.79 kW 4.78 COP	7.32 kW 4.18 COP	6.81 kW 3.63 COP	6.26 kW 3.13 COP	5.97 kW 2.89 COP	5.66 kW 2.66 COP	5.02 kW 2.22 COP	4.33 kW 1.80 COP	3.58 kW 1.41 COP
Low Temp	15 °C	6.98 kW 4.23 COP	6.54 kW 3.71 COP	6.06 kW 3.23 COP	5.53 kW 2.78 COP	5.25 kW 2.56 COP	4.97 kW 2.35 COP	4.36 kW 1.95 COP	3.70 kW 1.57 COP	3.00 kW 1.20 COP
	10 °C	5.99 kW 3.61 COP	5.58 kW 3.17 COP	5.12 kW 2.75 COP	4.63 kW 2.35 COP	4.37 kW 2.16 COP	4.10 kW 1.98 COP	3.53 kW 1.61 COP	2.92 kW 1.27 COP	2.26 kW 0.93 COP

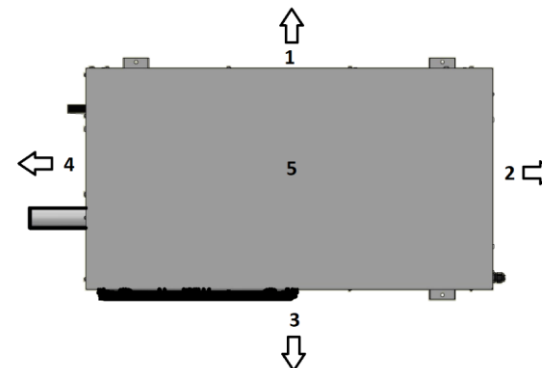

UNIT CLEARANCES		
Direction	Description	Minimum Clearance Required
1	Evaporator Coil	350 mm
2	Compressor Access	850 mm
3	Side - Fan Discharge	2500 mm
4	Water Connections	500 mm
5	Top - Height Clearance	300 mm

When units are placed side by side, allow at least 700mm between evaporator coils.

Rating Conditions: 27°C ambient, 60% RH, 27°C Water in